

## PRODUCT DATA SHEET

# Sika® Ucrete® MF

Smooth, heavy-duty, polyurethane floor screed

### DESCRIPTION

Sika® Ucrete® MF is a smooth, polyurethane, heavy-duty floor screed. It has very good resistance to aggressive chemicals, heavy abrasion and thermal shock.

### USES

Sika® Ucrete® MF is used as a wearing layer screed for Sika® Ucrete® flooring systems.

Sika® Ucrete® MF is used within dry process areas including the following application areas:

- Chemical and processing facilities
- Clean rooms
- Dry packing lines
- Storage areas
- Warehouses

Please note:

- The Product may only be used by experienced professionals.

### CHARACTERISTICS / ADVANTAGES

- Expert installation by fully trained and licensed applicators
- Resistant to bacterial or mould growth
- Suitable for application on to 7-day-old concrete and 3-day-old polymer screed
- Very good resistance to a wide range of chemicals
- Very good mechanical resistance
- Impermeable to liquids
- Non-tainting from the end of mixing
- Low VOC emissions
- Thermal expansion properties similar to concrete

### ENVIRONMENTAL INFORMATION

- Environmental Product Declaration (EPD) in accordance with EN 15804. EPD independently verified by Institut für Bauen und Umwelt e.V. (IBU)
- Specific Environmental Product Declaration (EPD) in accordance with EN 15804. EPD independently verified by EPD International AB

### CERTIFICATES AND TEST REPORTS

- Food and Beverage Facilities Suitability, Sika® Ucrete®, HACCP, Test Report No. I-PE-769-SA-2-RG-07
- Halal Certification Europe (HCE), Sika® Ucrete®, WHFC, Certificate No. 21453-2/1/1/Y3
- Indoor Air Comfort Gold EN 16516, Sika® Ucrete®, eurofins, Certificate No. IACG-321-01-01-2024D
- Indoor Air Comfort USA, Sika® Ucrete®, eurofins, Certificate No. IACG-321-01-01-2024
- Reaction to fire EN 13501-1, Sika® Ucrete® Flow systems, GHENT, Test Report No. CR 24-0480-01
- CE marking and declaration of performance based on EN 13813:2002 Screed material and floor screeds — Screed material — Properties and requirements — Synthetic resin screed material

## PRODUCT INFORMATION

<b>Composition</b>	Water-based polyurethane cement hybrid		
<b>Packaging</b>	Part 1	2.52 kg	
	Part 2	2.86 kg	
	Part 3	14.4 kg	
	Part 4	0.5 kg	
	Set	20.28 kg	
<b>Colour</b>	Cured colour	Red, Yellow, Cream, Grey, Light Grey, Green, Light Green, Blue (N)	
	Note: Exposure to ultraviolet light may result in discolouration and colour variation. This is an aesthetic change and has no influence on the function and performance.		
<b>Shelf Life</b>	Part 1	9 months	
	Part 2	12 months	
	Part 3	6 months	
	Part 4	24 months	
<b>Storage Conditions</b>	The Product must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +30 °C. Always refer to the packaging. Refer to the current Safety Data Sheet for information on safe handling and storage.		
<b>Density</b>	Mixed Product	1.91 kg/l	(EN ISO 2811-1)

## TECHNICAL INFORMATION


<b>Compressive Strength</b>	Cured 28 days at +23 °C	50 N/mm <sup>2</sup>	(EN 13892-2)
<b>Modulus of Elasticity in Compression</b>	4000 MPa		(BS 6319-6)
<b>Tensile Strength in Flexure</b>	Cured 28 days at +23 °C	18 N/mm <sup>2</sup>	(EN 13892-2)
<b>Tensile Strength</b>	Cured for 28 days at +20 °C	6 MPa	(BS 6319-7)
<b>Tensile Adhesion Strength</b>	> 2.0 N/mm <sup>2</sup> (concrete failure)		(EN 1542)
<b>Coefficient of Thermal Expansion</b>	3.6 × 10 <sup>-5</sup> °C <sup>-1</sup>		(ASTM C531)
<b>Reaction to Fire</b>	Class B <sub>fl</sub> -s1		(EN 13501-1)
<b>Chemical Resistance</b>	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.		
<b>Skid / Slip Resistance</b>	PTV, slider 96	35 wet conditions	(EN 16165)
	Class	R 10	
<b>Service Temperature</b>	Maximum	+70 °C	
	Minimum	-15 °C	
<b>Water Permeability</b>	Tested for 72 hours at 5 bar	Impermeable to water	(DIN 1048-5)

## APPLICATION INFORMATION

<b>Consumption</b>	<b>Layer</b>	<b>Product</b>	<b>Consumption</b>
	Primer	Sika® Ucrete® MF / PLC	2–3 kg/m <sup>2</sup>
	Wearing layer	Sika® Ucrete® MF	6–10 kg/m <sup>2</sup> for 3-5 mm
<b>Layer Thickness</b>	~4–6 mm		
<b>Product Temperature</b>	Maximum	+25 °C	
	Minimum	+18 °C	
<b>Ambient Air Temperature</b>	Maximum	+35 °C	
	Minimum	+12 °C	
<b>Substrate Temperature</b>	Maximum	+30 °C	
	Minimum	+12 °C	
<b>Curing Time</b>	<b>Substrate temperature</b>	<b>Return to traffic</b>	
	+8 °C	24–36 hours	
	+15 °C	24 hours	
Note: Times are approximate and will be affected by changing ambient and substrate conditions.			

## SYSTEM INFORMATION

**System Structure** Sika® Ucrete® MF

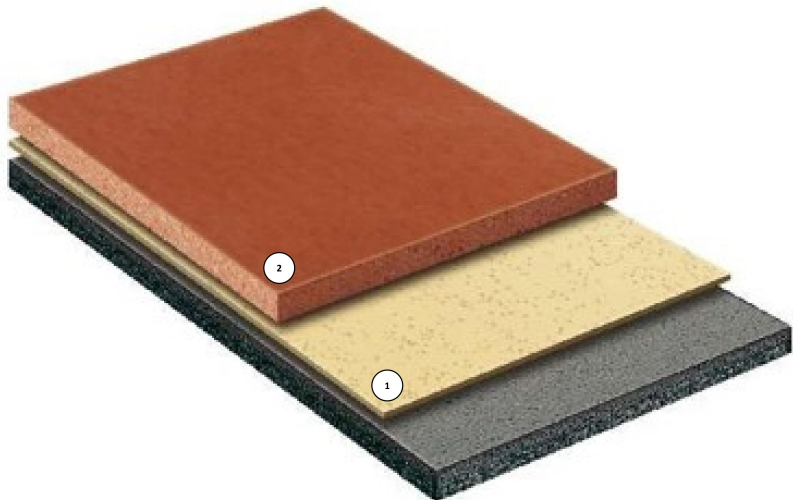

	<b>Layer</b>	<b>Product</b>
1.	Primer	Sika® Ucrete® MF / PLC
2.	Wearing layer	Sika® Ucrete® MF

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## ECOLOGY, HEALTH AND SAFETY

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

## APPLICATION INSTRUCTIONS

### SUBSTRATE PREPARATION

#### IMPORTANT

#### Reduced service life due to incorrect treatment of cracks

The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.

1. For static cracks, ensure the width is suitable for overcoating with Sika® Ucrete® MF.
2. For dynamic cracks, ensure the movement is within the movement capacity of Sika® Ucrete® MF.

#### TREATMENT OF JOINTS AND CRACKS

Construction joints and existing static surface cracks in substrate require pre-treating before full layer application. Use Sikadur® or Sikafloor® resins.

The Product can be applied on green or damp concrete with no standing water. Allow for at least 3 days for early concrete shrinkage to occur to prevent shrinkage cracks from appearing on the wearing surface.

Cementitious substrates must be structurally sound and of sufficient compressive strength (minimum 30 N/mm<sup>2</sup>) with a minimum tensile strength of 1.5 N/mm<sup>2</sup>.

Substrates must be clean, dry and free of contaminants such as dirt, oil, grease, coatings, laitance, surface treatments and loose friable material.

### APPLICATION

Application must be undertaken by a fully trained and licensed Sika® Ucrete® applicator.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

#### Sika Kimia Sdn. Bhd.

Lot 689, Nilai Industrial Estate,  
71800 Nilai, Negeri Sembilan D.K.  
Malaysia  
Phone: +606-7991762  
e-mail: info@my.sika.com  
Website: www.sika.com.my



#### Product Data Sheet

Sika® Ucrete® MF

June 2026, Version 04.02  
02081400000002003

SikaUcreteMF-en-MY-(06-2026)-4-2.pdf