

## SYSTEM DATA SHEET

# Sikafloor® MultiDur ES-39

SMOOTH, TOUGH-ELASTIC, UNICOLOUR EPOXY FLOOR COVERING WITH IMPROVED CHEMICAL RESISTANCE

### DESCRIPTION

Sikafloor® MultiDur ES-39 is a smooth, tough-elastic, coloured epoxy covering with improved chemical resistance for flooring applications

### USES

Sikafloor® MultiDur ES-39 may only be used by experienced professionals.

Crack-bridging and chemically resistant coating for concrete and screed surfaces in bund areas for the protection against water contaminating liquids

### CHARACTERISTICS / ADVANTAGES

- Improved chemical resistance
- Crack-bridging
- Liquid proof

### APPROVALS / STANDARDS


- Fire classification in accordance with DIN EN 13501-1: 2010, class Bfl-S1, Report-No. KB-Hoch-141525, Germany, January, 2015
- Approval as "Water protection system", Z-59.12-392, DIBt, Germany
- Static crack-bridging test, class A5 according to EN-1262-7, Report No.PB 5.1/12-099-1, MFPA Leipzig GmbH, Germany, September 2012

## PRODUCT INFORMATION

Packaging	Please refer to the individual Product Data Sheet
Shelf Life	Please refer to the individual Product Data Sheet
Storage Conditions	Please refer to the individual Product Data Sheet

## SYSTEM INFORMATION

System Structure Sikafloor® MultiDur ES-39

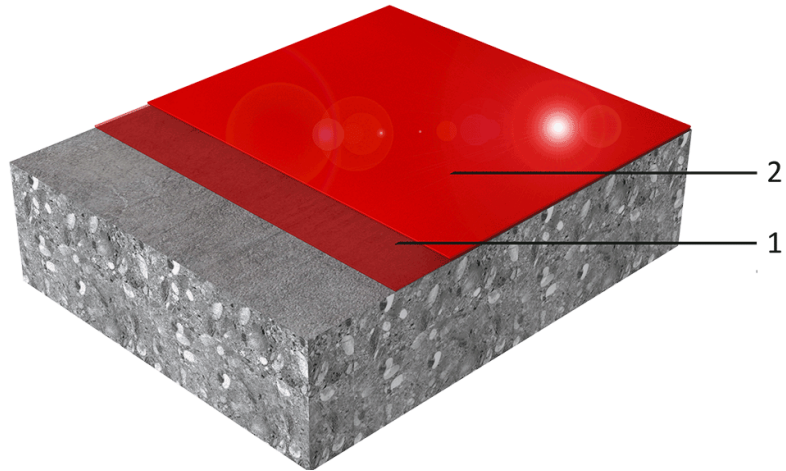

Layer	Product
1. Primer	Sikafloor®-161 HC
2. Wearing coat	Sikafloor®-390 N

Composition	Epoxy
Appearance	Smooth, gloss finish
Colour	Available in various colour shades.
Nominal Thickness	~2.0–3.0 mm

## TECHNICAL INFORMATION

Shore D Hardness	~60 (7 days at 23°C)	ZG (German Standard for water protection)
Crack Bridging Ability	0.4 mm Static, class A5 (23 °C)	(DIN EN 1062-7)
Reaction to Fire	Bfl-S1	(DIN EN 13501-1)
Chemical Resistance	Please refer to the chemical resistance of Sikafloor®-390 N	
Temperature Resistance	<b>Exposure*</b>	<b>Dry heat</b>
	Permanent	+50 °C
	Short-term max. 7 d	+80 °C
	Short-term max. 12 h	+100 °C
Short-term moist/wet heat* up to +80 °C where exposure is only occasional (i.e. during steam cleaning etc.)		
*No simultaneous chemical and mechanical exposure.		

## APPLICATION INFORMATION

Consumption	Sikafloor® MultiDur ES-39 system (~2–3 mm)		
	<b>Coating System</b>	<b>Product</b>	<b>Consumption</b>
	Primer	1 × Sikafloor®-161 HC	~0.3–0.5 kg/m <sup>2</sup>
	Wearing coat	Sikafloor®-390 N (un-filled)	~1.6 kg/m <sup>2</sup> /mm

<b>Product Temperature</b>	Please refer to the individual Product Data Sheet		
<b>Ambient Air Temperature</b>	+10 °C min. / +30 °C max.		
<b>Relative Air Humidity</b>	80 % r.h. max.		
<b>Dew Point</b>	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.		
<b>Substrate Temperature</b>	+10 °C min. / +30 °C max.		
<b>Substrate Moisture Content</b>	When performing application work with Sikafloor® MultiDur ES-39, the substrate moisture content must not exceed 4 % pbw measured by Tramex. Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).		
<b>Waiting Time / Overcoating</b>	Before applying Sikafloor®-390 N on Sikafloor®-161 HC allow:		
	<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum</b>
	+10 °C	24 hours	4 days
	+20 °C	12 hours	2 days
	+30 °C	8 hours	1 day
	Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.		
<b>Applied Product Ready for Use</b>	<b>Temperature</b>	<b>Foot traffic</b>	<b>Light traffic</b>
	+10 °C	~48 hours	~6 days
	+20 °C	~30 hours	~4 days
	+30 °C	~20 hours	~3 days
	For traffic with solid / hard wheeled lift trucks allow 3 weeks curing time.		

## MAINTENANCE

### CLEANING

Please refer to the Method Statement Sikafloor®-Cleaning Regime

### FURTHER DOCUMENTS

Please refer to :

- Sika® Method Statement Mixing & Applications of Flooring systems
- Sika® Method Statement Evaluation and Preparation of Surfaces for Flooring systems

### IMPORTANT CONSIDERATIONS

- Do not apply Sikafloor® MultiDur ES-39 on substrates with rising moisture.
- Freshly applied Sikafloor® MultiDur ES-39 must be protected from damp, condensation and water for at least 24 hours.
- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.
- For exact colour matching, ensure the Sikafloor®-390 N in each area is applied from the same control batch numbers.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or

other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

### BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

### LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

### ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

### LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's cur-

rent knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

**Sika Kimia Sdn. Bhd.**

Lot 689, Nilai Industrial Estate, 71800 Nilai  
Negeri Sembilan D.K., Malaysia  
Phone: +606-7991762  
Fax: +606-7991980  
e-mail: [info@my.sika.com](mailto:info@my.sika.com)  
Website: [www.sika.com.my](http://www.sika.com.my)



SYSTEM DATA SHEET  
Sikafloor® MultiDur ES-39  
August 2017, Version 01.01  
020811900000000015

SikafloorMultiDurES-39-en-MY-(08-2017)-1-1.pdf

