

## SYSTEM DATA SHEET

# Sikafloor® Traffic-2219 AP

Polyurea based crack bridging car park ceck coating system

### DESCRIPTION

Sikafloor® Traffic-2219 AP is a dynamic crack-bridging, waterproofing and slip resistant car park system based on pure polyurea waterproofing membrane and polyaspartic topcoat. It provides fast cure, hard wearing, high elastic, seamless finish, and color stable properties.

Sikafloor® Traffic-2219 AP is designed for exposed and intermediate car parking decks. The surface produces a slip resistant, low maintenance coloured semi-gloss finish.

### USES


Sikafloor® Traffic-2219 AP may only be used by experienced professionals.

- For use on exposed, intermediate decks and sheltered car park top decks where maximum crack bridging and wear resistance are required.
- As waterproofing coating for floors, walkways.

### SYSTEM INFORMATION

#### System Structure

Sikafloor® Traffic-2219 AP

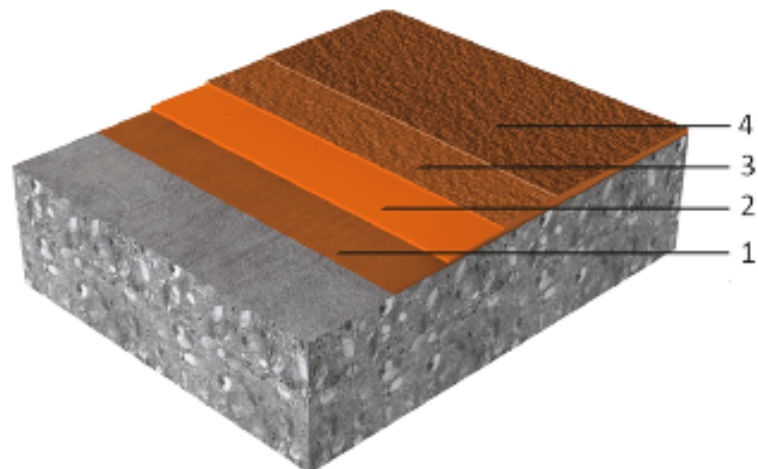

### CHARACTERISTICS / ADVANTAGES

- Dynamic crack bridge even at -20 °C
- High wear resistance
- Skid/slip resistant
- Rapid spray applied application
- Very fast set
- UV and color stable
- Good chemical and mechanical resistance
- Waterproof
- Low dirt retention, low maintenance

### ENVIRONMENTAL INFORMATION

Conformity with LEED v2009 IEQc 4.2: Low Emitting Materials - Paints and Coatings

### CERTIFICATES AND TEST REPORTS

- kiwa report P11935-1 with adapted local primer.
- elletipi s.r.l report

Layer	Product
1. Primer + Sand broadcast	Sikafloor®-161HC + Quartz sand 0.3~0.8mm
Optional: Scratch coat	Sikafloor®-161HC filled with Quartz sand
2. Waterproofing membrane	Sikalastic® M 689
3. Topcoat 1st	Sikafloor® TC 681 + Quartz sand 0.3~0.8mm
4. Topcoat 2nd	Sikafloor® TC 681

<b>Appearance</b>	Slip resistant, glossy finish
<b>Colour</b>	Sikafloor® TC 681 is available in following colours: approx. RAL 7032, 7035, 7040.
<b>Nominal Thickness</b>	Approx. 3.0 ~ 5.0 mm

## TECHNICAL INFORMATION

<b>Abrasion Resistance</b>	Average: 425 mg with H22, 1000g, 1000 cycles	(ISO 5470-1)	
<b>Tensile Adhesion Strength</b>	≥ 1.5 N/mm <sup>2</sup>	(EN 1542)	
<b>Permeability to Carbon Dioxide</b>	Sd ≥ 50 m	(EN1062-6)	
<b>Skid / Slip Resistance</b>	Dry at 20 °C	75	(EN13036-4) Pendulum test
	Wet at 20 °C	56	
<b>Resistance to Wearing</b>	AR: ~0 µm	(EN 13892-4)	
<b>Gloss Level</b>	Gloss		

## APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	1. Primer + Sand Broadcast	Sikafloor®-161HC Quartz sand 0.3 ~ 0.8 mm	0.3 ~ 0.5 kg/m <sup>2</sup> 0.8 ~ 1.0 kg/m <sup>2</sup>
	Optional Scratch coat + Broadcast sand up to 1mm roughness	Sikafloor®-161HC 1:0.5 filled with Quartz sand 0.3 ~ 0.8 mm	0.6 ~ 1.0 kg/m <sup>2</sup> * 2.0 ~ 3.0 kg/m <sup>2</sup>
	2. Waterproofing membrane	Sikalastic® M 689	2.3 ~ 3.4 kg/m <sup>2</sup>
	3. Topcoat 1st + Sand Broadcast	Sikafloor® TC 681 Quartz sand 0.3 ~ 0.8 mm	0.5 ~ 0.8 kg/m <sup>2</sup> In excess
	4. Topcoat 2nd	Sikafloor® TC 681	0.5 ~ 0.8 kg/m <sup>2</sup>

\* This consumption including filler

<b>Layer Thickness</b>	Approx. 3.0 mm ~ 5.0 mm* * The system consumption and system layer thickness vary according to country specific guidance and standards.
<b>Ambient Air Temperature</b>	+8 °C min. / +30 °C max. For spray applied membrane refer to the individual Product Data Sheet.
<b>Relative Air Humidity</b>	Max. 80 %
<b>Dew Point</b>	Beware of condensation! The temperature of the contact surfaces must be at least 3 °C above the ambient dew point temperature to reduce the risk of condensation
<b>Substrate Temperature</b>	+8 °C min. / +30 °C max.

<b>Substrate Moisture Content</b>	For primer Sikafloor-161 HC: ≤ 4 % pbw moisture content. Test method: Sika®-Tramex meter, CM-measurement on Oven-dry method No rising moisture according to ASTM (Polyethylene-sheet).																											
<b>Substrates</b>	Have an adequate pull-off strength min 1.5 N/mm <sup>2</sup> , no rising moisture.																											
<b>Pot Life</b>	Refer to related Product Data Sheets																											
<b>Applied Product Ready for Use</b>	After Sikafloor® TC-681 Application <table border="1"> <tr> <td>Ready for pedestrian traffic at 23 °C</td> <td>4 hours</td> </tr> <tr> <td>Ready for car traffic at 23 °C</td> <td>7 hours</td> </tr> <tr> <td>Fully cured at 23 °C</td> <td>7 days</td> </tr> </table>	Ready for pedestrian traffic at 23 °C	4 hours	Ready for car traffic at 23 °C	7 hours	Fully cured at 23 °C	7 days																					
Ready for pedestrian traffic at 23 °C	4 hours																											
Ready for car traffic at 23 °C	7 hours																											
Fully cured at 23 °C	7 days																											
<b>Waiting Time</b>	Overcoating time between primer and Sikalastic® M 689 refer to selected primer PDS. Below each layer after application the interval time shows: <table border="1"> <thead> <tr> <th rowspan="2"></th> <th colspan="3">Minimum waiting time, hours</th> <th colspan="3">Maximum waiting time, hours</th> </tr> <tr> <th>10 °C</th> <th>20 °C</th> <th>30 °C</th> <th>10 °C</th> <th>20 °C</th> <th>30 °C</th> </tr> </thead> <tbody> <tr> <td>Sikalastic® M 689</td> <td>Immediately</td> <td></td> <td></td> <td>8</td> <td>4</td> <td>2</td> </tr> <tr> <td>Sikafloor® TC 681</td> <td>4</td> <td>3</td> <td>2</td> <td>24</td> <td>16</td> <td>12</td> </tr> </tbody> </table>		Minimum waiting time, hours			Maximum waiting time, hours			10 °C	20 °C	30 °C	10 °C	20 °C	30 °C	Sikalastic® M 689	Immediately			8	4	2	Sikafloor® TC 681	4	3	2	24	16	12
	Minimum waiting time, hours			Maximum waiting time, hours																								
	10 °C	20 °C	30 °C	10 °C	20 °C	30 °C																						
Sikalastic® M 689	Immediately			8	4	2																						
Sikafloor® TC 681	4	3	2	24	16	12																						

Note: Times are approximate and will be affected by changing ambient conditions.

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## FURTHER INFORMATION

- Sika Method Statement: Evaluation and preparation of surfaces for flooring systems
- Sika Method Statement: Mixing & Application of flooring systems
- Sika Method Statement Sikalastic®-8800 & M689

## IMPORTANT CONSIDERATIONS

- Freshly applied Sikafloor® Traffic-2219 AP must be protected from damp, sweat, condensation and water for at least 2 hours.
- The incorrect assessment and treatment of cracks may lead to a reduced service life time and reflective cracking.
- For exact colour matching, ensure Sikafloor® TC 681 is applied from the same control batch number
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sup>2</sup> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.
- Always ensure adequate fresh air ventilation during application and curing

## APPLICATION INSTRUCTIONS

### SUBSTRATE PREPARATION

Sika Method Statement: Evaluation and preparation of surfaces for flooring systems

### MIXING

Sika Method Statement: Mixing & Application of flooring systems  
Sika Method Statement Sikalastic®-8800 & M689

### APPLICATION

Sika Method Statement: Mixing & Application of flooring systems  
Sika Method Statement Sikalastic®-8800 & M689

### CLEANING OF TOOLS

Refer to Sika Method Statement: Sikafloor® -Cleaning Regime

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### **Sika Kimia Sdn. Bhd.**

Lot 689, Nilai Industrial Estate,  
71800 Nilai, Negeri Sembilan D.K.  
Malaysia  
Phone: +606-7991762  
e-mail: [info@my.sika.com](mailto:info@my.sika.com)  
Website: [www.sika.com.my](http://www.sika.com.my)



**System Data Sheet**  
**Sikafloor® Traffic-2219 AP**  
June 2026, Version 01.01  
02081290000245276

SikafloorTraffic-2219AP-en-MY-(06-2026)-1-1.pdf

