

PRODUCT DATA SHEET

Sika® Ucrete® UD 200

Hygienic, slip-resistant, heavy-duty polyurethane floor screed

DESCRIPTION

Sika® Ucrete® UD 200 is a lightly textured, heavy-duty resin floor with very good resistance to aggressive chemicals, heavy impact and temperatures up to +150 °C.

USES

Sika® Ucrete® UD 200 is used as a wearing layer screed for Sika® Ucrete® flooring systems.

Sika® Ucrete® UD 200 is used within wet and dry process areas, including the following application areas:

- Food and beverage facilities
- Pharmaceutical facilities
- Chemical and processing facilities
- Manufacturing facilities and workshops

Please note:

- The Product may only be used by experienced professionals.

CHARACTERISTICS / ADVANTAGES

- Expert installation by fully trained and licensed applicators
- Resistant to bacterial or mould growth
- Suitable for application on to 7-day-old concrete and 3-day-old polymer screed
- Can be accelerated with Sika® Ucrete® Accelerator for fast installation within a 12-hour window
- Very good resistance to a wide range of chemicals
- Very good mechanical resistance
- Impermeable to liquids
- Non-tainting from the end of mixing
- Low VOC emissions
- Thermal expansion properties similar to concrete
- Tolerant to substrates with high moisture content

ENVIRONMENTAL INFORMATION

- Environmental Product Declaration (EPD) in accordance with EN 15804. EPD independently verified by Institut für Bauen und Umwelt e.V. (IBU)
- Specific Environmental Product Declaration (EPD) in accordance with EN 15804. EPD independently verified by EPD International AB

CERTIFICATES AND TEST REPORTS

- Halal Certification Europe (HCE), Sika® Ucrete®, WHFC, Certificate No. 21453-2/1/1/Y3
- Food and Beverage Facilities Suitability, Sika® Ucrete®, HACCP, Test Report No. I-PE-769-SA-2-RG-07
- Indoor Air Comfort Gold EN 16516, Sika® Ucrete®, eurofins, Certificate No. IACG-321-01-01-2024D
- Indoor Air Comfort USA, Sika® Ucrete®, eurofins, Certificate No. IACG-321-01-01-2024
- Reaction to fire EN 13501-1, Sika® Ucrete® Trowel Systems, GHENT, Test Report No. CR 24-0478-01
- CE marking and declaration of performance based on EN 13813:2002 Screed material and floor screeds — Screed material — Properties and requirements — Synthetic resin screed material

PRODUCT INFORMATION

Composition	Water-based polyurethane cement hybrid		
Packaging	Part 1	2.37 kg	
	Part 2	2.86 kg	
	Part 3	24.8 kg	
	Part 4	0.5 kg	
	Set	30.53 kg	
Colour	Cured colour	Red, Yellow, Cream, Grey, Light Grey, Green, Light Green, Blue (N).	
	Note: Exposure to ultraviolet light may result in discolouration and colour variation. This is an aesthetic change and has no influence on the function and performance.		
Shelf Life	Part 1	9 months	
	Part 2	12 months	
	Part 3	12 months	
	Part 4	24 months	
Storage Conditions	The Product must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +30 °C. Always refer to the packaging. Refer to the current Safety Data Sheet for information on safe handling and storage.		
Density	Mixed Product	2.06 kg/l	(EN ISO 2811-1)

TECHNICAL INFORMATION


Compressive Strength	Cured 28 days at +23 °C	52 N/mm ²	(EN 13892-2)
Modulus of Elasticity in Compression	3250 MPa		(BS 6319-6)
Tensile Strength in Flexure	Cured 28 days at +23 °C	14 N/mm ²	(EN 13892-2)
Tensile Strength	Cured for 28 days at +20 °C	6 MPa	(BS 6319-7)
Tensile Adhesion Strength	> 2.0 N/mm ² (concrete failure)		(EN 1542)
Coefficient of Thermal Expansion	4 × 10 ⁻⁵ °C ⁻¹		(ASTM C531)
Reaction to Fire	Class B _{fl} -s1		(EN 13501-1)
Chemical Resistance	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.		
Skid / Slip Resistance	PTV, slider 96	40-45 wet conditions	(EN 16165)
	Class	R 11	
Service Temperature	Thickness	Minimum	Maximum
			Occasional spillage
	6 mm	-25 °C	+80 °C
	9 mm	-40 °C	+120 °C
	12 mm	-40 °C	+130 °C
			+150 °C
Water Permeability	Tested for 72 hours at 5 bar	Impermeable to water	(DIN 1048-5)

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	Primer	Sika® Ucrete® MF	2 kg/m²
	Wearing layer	Sika® Ucrete® UD 200	13–16 kg/m² for 6 mm 19–22 kg/m² for 9 mm 24–26 kg/m² for 12 mm
Layer Thickness	~6–12 mm		
Product Temperature	Maximum	+30 °C	
	Minimum	+10 °C	
Ambient Air Temperature	Maximum	+35 °C	
	Minimum	+5 °C	
Substrate Temperature	Maximum	+30 °C	
	Minimum	+5 °C	
Curing Time	Substrate temperature	Return to traffic	
	+8 °C	16–24 hours	
	+10 °C	4 hours (with Sika® Ucrete® Accelerator)	
Note: Times are approximate and will be affected by changing ambient and substrate conditions.			

SYSTEM INFORMATION

System Structure

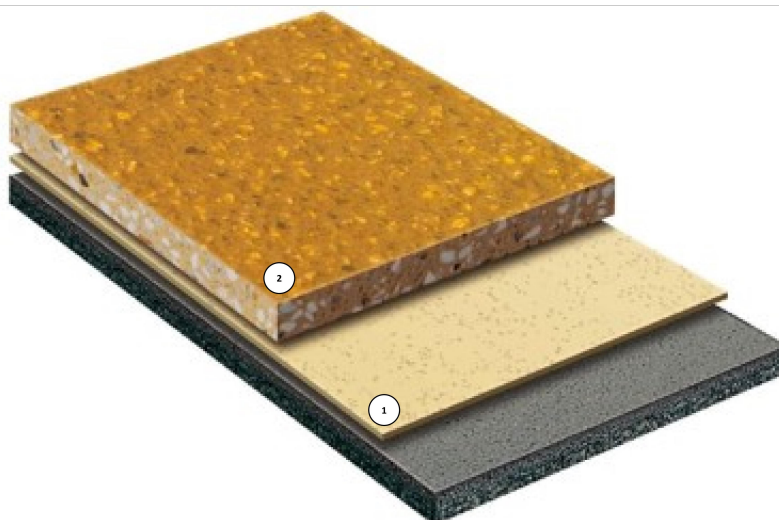

	Layer	Product
1.	Primer	Sika® Ucrete® MF
2.	Wearing layer	Sika® Ucrete® UD 200

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER INFORMATION

Select from the following specification clauses as required:

- A 6 mm Sika® Ucrete® UD 200 floor is fully resistant to liquid spillage and discharge up to +80 °C and can be lightly steam-cleaned. Suitable for freezer tem-

peratures down to -25 °C.

- A 9 mm Sika® Ucrete® UD 200 floor is fully resistant to high temperature spillage and discharge up to +120 °C and is fully steam-cleanable. Suitable for freezer temperatures down to -40 °C.
- A 12 mm Sika® Ucrete® UD 200 floor is fully resistant to high temperature spillage and discharge up to +130 °C and occasional spillage up to +150 °C and is fully steam-cleanable. Suitable for freezer temperatures down to -40 °C

ECOLOGY, HEALTH AND SAFETY

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

IMPORTANT

Reduced service life due to incorrect treatment of cracks

The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.

1. For static cracks, ensure the width is suitable for overcoating with Sika® Ucrete® UD 200.
2. For dynamic cracks, ensure the movement is within the movement capacity of Sika® Ucrete® UD 200.

TREATMENT OF JOINTS AND CRACKS

Construction joints and existing static surface cracks in substrate require pre-treating before full layer application. Use Sikadur® or Sikafloor® resins.

The Product can be applied on green or damp concrete with no standing water. Allow for at least 3 days for early concrete shrinkage to occur to prevent shrinkage cracks from appearing on the wearing surface.

Cementitious substrates must be structurally sound and of sufficient compressive strength (minimum 30 N/mm²) with a minimum tensile strength of 1.5 N/mm².

Substrates must be clean, dry and free of contaminants such as dirt, oil, grease, coatings, laitance, surface treatments and loose friable material.

APPLICATION

Application must be undertaken by a fully trained and licensed Sika® Ucrete® applicator.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Kimia Sdn. Bhd.

Lot 689, Nilai Industrial Estate,
71800 Nilai, Negeri Sembilan D.K.
Malaysia
Phone: +606-7991762
e-mail: info@my.sika.com
Website: www.sika.com.my



Product Data Sheet

Sika® Ucrete® UD 200

June 2026, Version 04.01

02081400000002013

SikaUcreteUD200-en-MY-(06-2026)-4-1.pdf

